

POS Peripheral Dock PPD Series



TYSSO®

Insist on the Best




FEATURES


- Steady aluminum die-casting base with VESA 75mm mounting hole
- Compact and solid industrial design
- Cost effective
- Wide range tilting angle 15 ~ 80 degrees
- Optional MSR, rear fixed or pole type VFD, speakers
- Support MSR interface USB, PS2, or serial port
- Support touch interface USB or serial port
- Rear panel ventilator with water spill proof
- Front panel with water spill proof
- Power adapter hidden on base
- Dock only model: PPD-1000

SPECIFICATIONS

Display			
Model	PPD-1700	PPD-1500	PPD-1210
TFT LCD	17"	15"	12.1"
Brightness	300 Nits	250 Nits	180 or 400 Nits
Resolution	1280 x 1024 Pixel	1024 x 768 Pixel	
Touch Screen	5 Wire Resistive Type, 25-Point Calibration		
Tilting Angle	15 ~ 80 Degrees		
I/O Ports			
Serial	RS-232 DB-9 x 2 (Optioned Touch x 1, MSR x1)		
USB	USB2.0 x 1 for Touch Panel		
RJ 45	PS2 or USB Optioned for MSR		
VGA	1 x DB-15, Female, Support up to XGA / SXGA at 75Hz		
Audio In	1 x Audio Jack with Internal Speaker 2W x 2		
Others			
Option	MSR, VFD, Speaker		
VESA	75mm		
Power Input	12VDC 48W	12VDC 24W	
Color	Black or Silver Optioned for Front Panel		
Compliance	FCC / CE / WEEE / RoHS		
Weight	6.4 Kg	5.4 Kg	5 Kg
Dimension (W x H x D: mm)	416 x 370 x 330	356 x 340 x 305	305 x 320 x 305
Operating Temperature	5 °C ~ 40 °C		
Storage Temperature	-20 °C ~ 60 °C		
Storage Humidity	20% - 80% RH, Non-condensing		

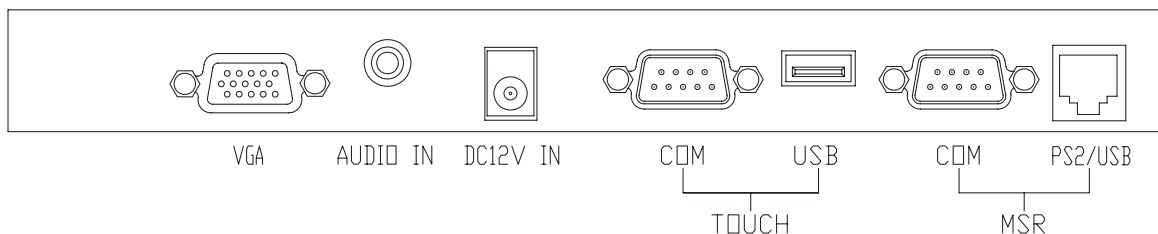

DIMENSIONS

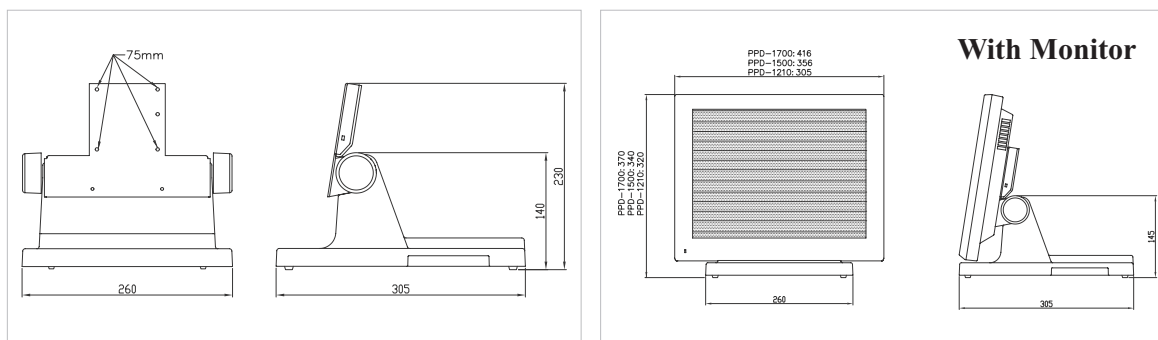

TYSSO[®]
Insist on the Best

Manufacturer

FAMETECH INC.

2F, No. 165, Sec. 2, Ta-Tung Rd.,
Hsi-Chih 221, Taipei Hsien, Taiwan
Tel : 886-2-8692-6300
Fax: 886-2-8692-6301
E-Mail: tyssso@ms6.hinet.net
URL: <http://www.famotech.com.tw>

Distributor